

Park Rumburk has occurred a planning decision and with its 40,896 sq m it will be an industrial space suitable for logistics, e-commerce and production. The industrial park is located on the Czech-German border with a sufficient human labour of Šluknov locality.

**MLADÁ BOLESLAV** 80 km, 75 min PRAGUE 125 km, 100 min

**DRESDEN** 110 km, 100 min BERLIN 270 km, 3 hrs



# **LOCATION IS KEY**

# DEVELOPMENT SPACE

Park Rumburk will offer approx. 40,896 sq m of industrial space suitable for logistic, e-commerce and production activities.

### LOCATION

Ideal location to supply Germany, the Czech Republic and Poland.

#### ACCESS


It is the destination of the I/9 road from Prague.

# BORDERS

Location enable perfect connection to German and Polish borders.

### PUBLIC TRANSPORT

The town of Rumburk in the Šluknov region in the Děčín district is an important railway junction. It is located on the route of the main long-distance bus lines connecting Prague with the Šluknov region and is also the center of regional bus transport for the immediate vicinity.

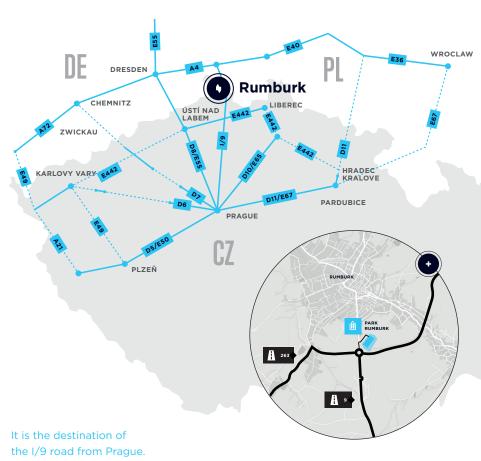

# **BUILDING INFORMATION**

Building 1


40,896 sq m

# **WAREHOUSE**

Column grid 12 m × 24 m Clear height 10 m ESFR sprinkler system Light intensity in the hall 200 lux Skylights min 2% Floor loading 5 t/sq m

# **OFFICE PREMISES**

Clear height 2.7 m Light intensity 500 lux Built to suit solution

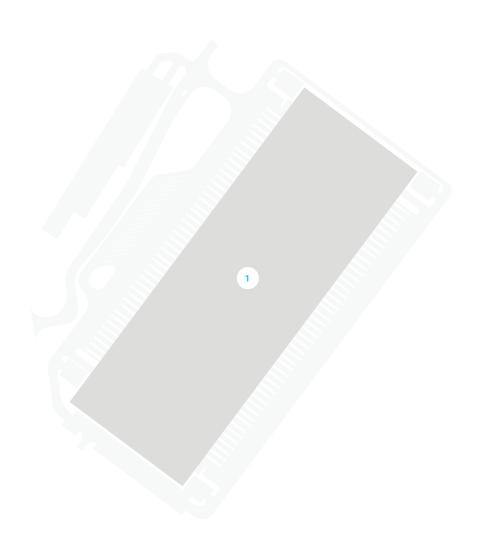

# STANDARD TECHNICAL SPECIFICATION

## 1 SUPPORTING STRUCTURE

Pad or pilot foundations, insulated plinth panels up to 30 cm above floor.

# 6 HALL INSTALLATIONS

Gas Sahara heaters or infrared gas radiators. heating according to norms for warehousing.

## 2 FLOOR

Fibre reinforced concrete floor. PE membrane, cut joints, 18 cm thick, surface treated with hardener.

#### 7 PRODUCTION UPGRADE (OPTIONAL)

Increased façade and roof insulation.

Corrugated steel sheets, mineral wool insulation. PVC membrane.

#### 8 OFFICES

2 level custom designed in-built, incl. offices, socials, locker rooms, day room, excl. furniture and appliance.

## 4 FAÇADE

Horizontal sandwich panels with mineral wool insulation.

### 9 OUTSIDE AREAS

Hard areas from concrete pavers, sloped for drainage.

### 5 DOCKS

1x electrically operated  $3 \times 3.2$  m dock for each 1.000 sq m of hall.



