PANATTONI PARK PRAGUE AIRPORT II

29,821 sq m



Park Prague Airport II offers 29,821 sq m of A-class industrial space suitable for logistics and production activities. Located in Pavlov municipality, Prague West, just 7 km from the border of capital city Prague.

KLADNO 10 km, 10 min VÁCLAV HAVEL AIRPORT PRAGUE 17 km, 15 min PRAGUE RING ROAD 11 km, 10 min



LOCATION IS KEY

DEVELOPMENT SPACE

Park Prague Airport II offers 29,821 sq m of A-class industrial space suitable for logistics and production activities.

ACCESS


Excellent and easy access to motorway D6 connecting Prague - Karlovy Vary - Germany (exit 7).

BORDERS

Prague Ring Road providing excellent connection to highway network only 11 km from the site. Qualified labor force available due to the close proximity of Prague.

PUBLIC TRANSPORT

Existing public transport providing quick connection to Prague (both train and bus).

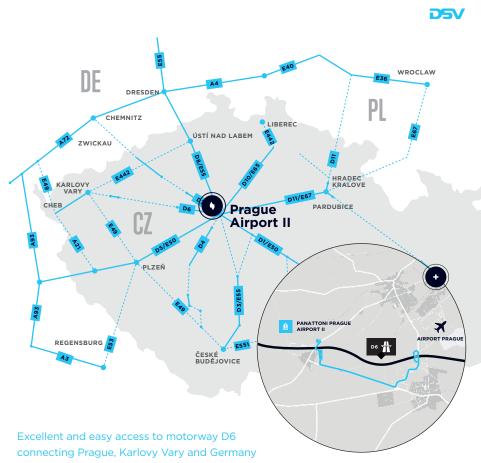

BUILDING INFORMATION

Building 1.1 7,546 sq m Building 1.2 3,600 sq m **Building 2** 9,792 sq m

- under construction

Building 3 8,883 sq m

- under development



Column grid 12 m × 24 m Clear height 10 m ESFR sprinkler system Light intensity in the hall 200 lux Skylights min 2% Floor loading 5 t/sq m

OFFICE PREMISES

Clear height 2.7 m Light intensity 500 lux Built to suit solution



DSV (Brit)

DSV

We meet the strictest standards of modern, environmentally friendly construction.

This is why our projects aim for the BREEAM Very Good rating at least.



STANDARD TECHNICAL SPECIFICATION

1 SUPPORTING STRUCTURE

Pad or pilot foundations, insulated plinth panels up to 30 cm above floor.

6 HALL INSTALLATIONS

Gas Sahara heaters or infrared gas radiators, heating according to norms for warehousing.

Fibre reinforced concrete floor, PE membrane, cut joints, 18 cm thick, surface treated with hardener.

7 PRODUCTION UPGRADE (OPTIONAL)

Increased façade and roof insulation.

Corrugated steel sheets, mineral wool insulation, PVC membrane.

8 OFFICES

2 level custom designed in--built, incl. offices, socials, locker rooms, day room, excl.

4 FAÇADE

Horizontal sandwich panels with mineral wool insulation.

9 OUTSIDE AREAS

Hard areas from concrete pavers, sloped for drainage.

5 DOCKS

1x electrically operated 3 x 3.2 m dock for each 1,000 sq m of hall.



