PARK KONIN

PLANNED AREA: 24,912 sq m



Konin Accolade offers 24,912 sq m of industrial space suitable for light production, logistic and e-commerce activities. Konin is now the center of the energy industry for both its region and the whole of Poland.

GDAŃSK PORT 180 km, 120 min BYDGOSZCZ CITY CENTRE 5 km, 10 min ŁÓDŹ 230 km, 150 min



LOCATION IS KEY

DEVELOPMENT SPACE

Konin Accolade offers 24,912 sq m (existing area 5,657 sq m + planned to build area 19,255 sq m) of industrial space suitable for light production, logistic and e-commerce activities.

ACCESS


Excellent and easy access to the motorway A2 connecting Warsaw, Łódź, Poznań and Germany. The frequented Berlin-Moscow railway corridor also runs through the town.

PUBLIC TRANSPORT

Bus stop 600 m from the Park providing connection with 2 bus lines. 10 km from the Park there is also a railway station.

LABOR FORCE

Available resources of qualified personnel with population of 3.4 million people living in the Central Poland region.

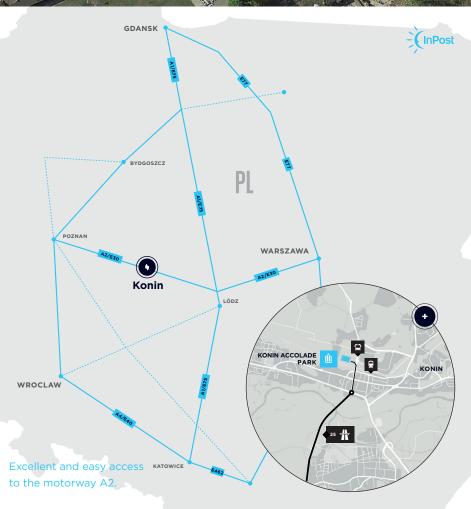

BUILDING INFORMATION

Building 1

Building 2 - planned

5,657 sq m


19,255 sq m

WAREHOUSE

Column grid Clear height 9,5 m ESFR sprinkler system Light intensity in the hall Skylights min 2% Floor loading 5 t/sq m

OFFICE PREMISES

Clear height Light intensity 500 lx Built to suit solution

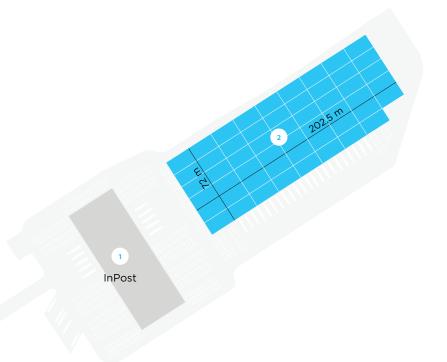

STANDARD TECHNICAL SPECIFICATION

1 SUPPORTING STRUCTURE

Pad or pilot foundations, insulated plinth panels up to 30 cm above floor.

6 HALL INSTALLATIONS

Gas Sahara heaters or infrared gas radiators, heating according to norms for warehousing.

2 FLOOR

Fibre reinforced concrete floor, PE membrane, cut joints, 18 cm thick, surface treated with hardener.

7 PRODUCTION UPGRADE (OPTIONAL)

Increased façade and roof insulation.

3 ROOI

Corrugated steel sheets, mineral wool insulation, PVC membrane.

8 OFFICES

2 level custom designed in-built, incl. offices, socials, locker rooms, day room, excl. furniture and appliance.

4 FAÇADE

Horizontal sandwich panels with mineral wool insulation.

9 OUTSIDE AREAS

Hard areas from concrete pavers, sloped for drainage.

5 DOCKS

1x electrically operated 3 x 3.2 m dock for each 1.000 sq m of hall.



