PANATTONI PARK BYDGOSZCZ III | 44,342 sq m | • Accolade



Panattoni Park Bydgoszcz III offers 44.342 sg m of industrial space suitable for light production, logistic, and e-commerce activities. The Park is part of the Bydgoszcz Industrial and Technology Park, which is one of the largest industrial zones in Poland.

BYDGOSZCZ CITY CENTRE 6 km. 10 min

GDAŃSK PORT 180 km, 120 min

ŁÓDŹ 230 km, 150 min



LOCATION IS KEY

INDUTRIAL SPACE

Panattoni Park Bydgoszcz III offers 44,342 sq m of industrial space suitable for light production, logistic, and e-commerce activities.

ACCESS

Excellent and easy access to S25 expressway (Koszalin - Konin), S10 road (Szczecin - Warsaw) and S5 road (Poznań - Gdańsk). Bydgoszcz is one of the 5 largest railroad-hubs in Poland due to the intersection of the line No 131 (N-S) and line 18 (E-W).

PUBLIC TRANSPORT


Public transport near the Park ensures easy commuting for employees. A railway station is located 10 km from the Park.

LABOR FORCE

Available resources of qualified personnel with a population of 2 million inhabitants and 16 universities with 45,000 students.

OTHER ADVANTAGES

Bydgoszcz inland port, which is a part of International Water Tract No E70, connecting Antwerp and Lithuania, offers a capacity of 2 mil. tons p.a. transport. There is also a railway station nearby.

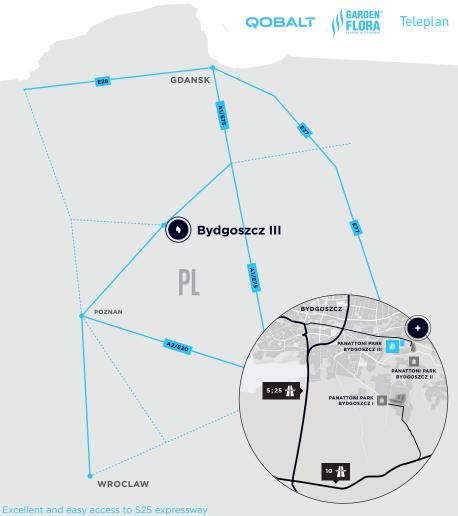

(Koszalin - Konin), S10 road (Szczecin - Warsaw) and S5 road (Poznań - Gdańsk).

BUILDING INFORMATION

Building 1.1

Building 1.2

37,596 sq m


6,746 sq m

WAREHOUSE

Column grid standard
Clear height 10 m
ESFR sprinkler system
Light intensity in the hall 150-250 lux
Skylights min 2%
Floor loading 5 t/sq m

OFFICE PREMISES

Clear height 3 m Light intensity 400-600 lux Built to suit solution

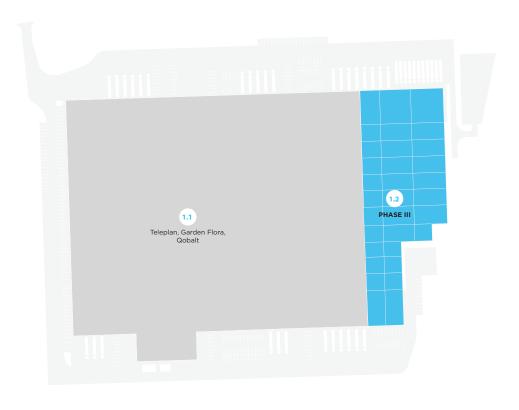

STANDARD TECHNICAL SPECIFICATION

1 SUPPORTING STRUCTURE

Pad or pilot foundations, insulated plinth panels up to 30 cm above floor.

6 HALL INSTALLATIONS

Gas Sahara heaters or infrared gas radiators, heating according to norms for warehousing.

2 FLOOR

Fibre reinforced concrete floor, PE membrane, cut joints, 18 cm thick, surface treated with hardener.

7 PRODUCTION UPGRADE (OPTIONAL)

Increased façade and roof insulation.

3 ROOF

Corrugated steel sheets, mineral wool insulation, PVC membrane.

8 OFFICES

2 level custom designed inbuilt, incl. offices, socials, locker rooms, day room, excl. furniture and appliance.

4 FAÇADE

Horizontal sandwich panels with mineral wool insulation.

9 OUTSIDE AREAS

Hard areas from concrete pavers, sloped for drainage.

5 DOCKS

1x electrically operated 3 x 3.2 m dock for each 1.000 sq m of hall.

